


Polarization Maintaining Filter Wavelength Division Multiplexer (T1550R1480)

1. Features:

- Low insertion loss
- High extinction ratio
- High Return Loss
- Excellent environmental stability and reliability

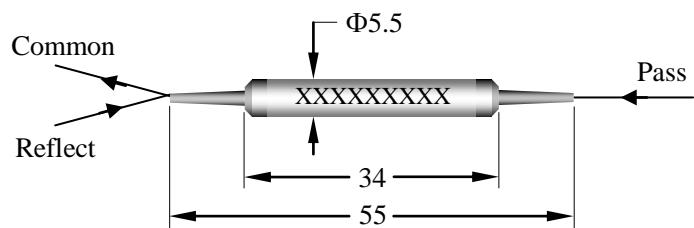

2. Applications:

- Fiber Laser
- Fiber Sensor
- Communication System
- Test Instrumentations
- Polarization maintaining optical system



3. Compliance:

- Telcordia GR-1209-CORE
- Telcordia GR-1221-CORE
- RoHS

4. Specifications:

Parameter	Type	Units	Values
Pass Band Wavelength Range		nm	1550±15
IL over Pass Band		dB	≤0.7
Pass band Isolation		dB	≥30
Reflection Band Wavelength Range		nm	1480±10
IL over Reflection Band (Input2→Output)		dB	≤0.5
Reflection Band Isolation		dB	≥13
Extinct Ratio		dB	≥20
Optical Return Loss		dB	≥50
Power Handling (Max)		mW	≤500
Thermal Stability		dB/°C	≤0.005
Tensile Load		N	≤5
Operating Temperature Range		°C	-5 to 70
Storage Temperature Range		°C	-40 to 85
Fiber type		---	1550 Panda fiber or 1310 Panda fiber

*The specifications are w/o connector.

* For devices with connectors, 0.3dB higher for IL, 5dB lower for RL and 2dB lower for ER.

* For device with connector, key aligned to slow axis.

5. Product Ordering information:

PMFWDM		XX	X	X	XXX	XX	XX
Product Description	Port Type	Operating Wavelength	Pigtail Type	Fiber Type	Com&Ref&Pass Connector Type	Package Size	Fiber Length
P=Polarization	1X2	T98R15	0=250um	1=PM98	0=None	34=5.5×34	05=0.5m
M=Maintaining		T15R98	1=900um	2=PM15	1=FC/UFC	35=5.5×35	08=0.8m
FWDM		T15R1314		3=PM13	2=FC/APC		10=1.0m
				4=others	3=SC/UPC		12=1.2m
					4=SC/APC		

深圳市深建通信科技有限公司

E-mail: sales@shenjianx.com

Web : <http://www.shenjianx.com>